



# Cygnus 4 General Purpose Multiple-Echo Ultrasonic Thickness Gauge

Measures metal thickness to determine wastage or corrosion accurately, quickly and without removing protective coatings



"Simplicity through technology"

# NEW CYGNUS 4 GENERAL PURPOSE MULTIPLE-ECHO THICKNESS GAUGE

The NEW Cygnus 4 ultrasonic thickness gauge is a small, tough and accurate through coating digital thickness gauge.

Designed for the harshest of environments with a simple to use keypad, intuitive menus and a colour LCD display which can be viewed in all lighting conditions.



The twin shot injection moulded enclosure has a soft but durable TPE outer skin which is comfortable to hold and protects against bumps while the hard internal shell offers maximum strength and environmental protection certified to the demanding US MIL STD 810G standard.

Perfect for use on flat plate, curved surfaces or pipes our Multiple-Echo single crystal probe technology means you can measure through thick coatings and only the remaining metal thickness is displayed.

## KEY FEATURES


- Multiple-Echo for reliable, accurate through coating measurements as specified by Classification Societies
- Large bright colour LCD screen with back light
- Deep-coat mode, measure through coatings up to 20 mm thick
- Wrist mountable
- Min/max measurement limit functions with visual and vibrate alert
- Intuitive easy to use menu
- Extremely rugged enclosure – shock and impact to US MIL STD 810G
- Environmental sealing to IP67 – US MIL STD 810G

## KEY FEATURES (CONT.)

- Cygnus echo strength bars to assist quick measurements
- Buttons integral with the TPE moulding and designed for minimum 100,000 depressions.

## MULTIPLE-ECHO MEASURING MODE

- Measures remaining metal thickness of corroded and coated structures
- All measurements are error checked using 3 return echoes to give repeatable, reliable results
- Accepted by all major classification societies
- Echo strength indicator to aid measurement.

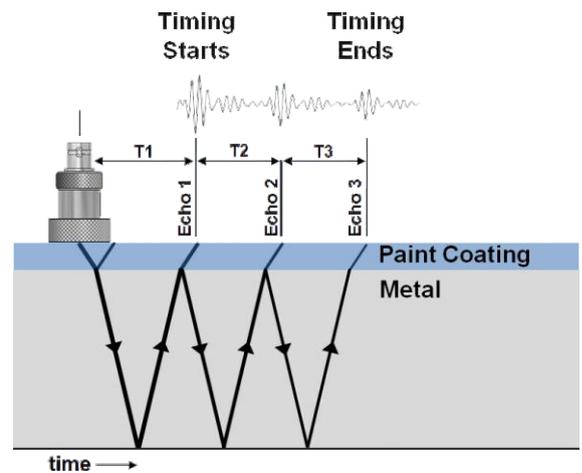

With Multiple-Echo, readings are taken by measuring the time delay between any three consecutive back-wall echos. The time of T1 (coating thickness) is ignored. The times of T2 and T3 are equal to the time that it takes to travel through the metal. Only by looking at three echos can the measurements be automatically verified (where  $T2 = T3$ ).

All Cygnus thickness gauges are supplied with a 3 YEAR Cygnus Gauge Warranty as standard



## SPECIFICATION

<b>Materials</b>	Sound velocities between 1,000 m/s - 9,000 m/s - covers virtually all common engineering materials
<b>Accuracy</b>	±0.1 mm or 0.1% of thickness measurement, whichever is greatest, when calibrated in accordance with Cygnus Instruments calibration procedure
<b>Resolution</b>	0.1 mm or 0.05 mm
<b>Probes</b>	Single crystal probes: 6 mm - 5 MHz (S5A) 13 mm - 2.25 MHz (S2C (standard)), 3.5 MHz (S3C) or 5 MHz (S5C) 19 mm - 2.25 MHz (S2D)
<b>Measurement Range in Steel</b>	Single crystal probes: 3 mm - 250 mm with 2.25 MHz probe (S2C/D) 2 mm - 150 mm with 3.5 MHz probe (S3C) 1 mm - 50 mm with 5 MHz probe (S5C/A)
<b>Connector</b>	1 x Lemo 1
<b>Power</b>	3 x AA batteries
<b>Battery Life</b>	10 hours minimum
<b>Display</b>	2.4" quarter VGA LCD
<b>Size</b>	132 mm x 82 mm x 34 mm
<b>Weight</b>	300 grams (inc. batteries)
<b>Operating Temp.</b>	-10°C to 50°C
<b>Environmental Rating</b>	IP67 MIL STD 810G Method 501.6 (high temp +55°C) MIL STD 810G Method 502.6 (low temp -20°C) MIL STD 810G Method 507.6 (humidity 95%) MIL STD 810G Method 512.6 (immersion - 1 metre for 30 mins)
<b>Shock and Impact</b>	MIL STD 810G Method 514.7 (vibration - 1 hour each axis) MIL STD 810G Method 516.7 (shock 20g - 11ms half sine shock pulse, 40g 11ms in each axis) MIL STD 810G Method 516.7 (26 drops - transit drop 1.22 m)
<b>Compliance</b>	CE, British Standard BS EN 15317:2013 (specification for the characterisation and verification of ultrasonic thickness measuring equipment)
<b>Environmental</b>	RoHS, WEEE compliant
<b>Warranty</b>	3 years on gauge and 6 months on probe

*\*Specifications are subject to change*

## CYGNUS PROBES AND CABLES

### Cygnus Stainless Steel INOX Probes (Single Crystal Probes)

The INOX probes have an updated ergonomic design with easy to read frequency, identification and serial number. All frequencies of INOX probes have a black face and a colour coding system to identify probe frequencies and a replaceable wear membrane for long life.



### Cygnus Cables

Using standard industry connectors the probe lead uses a custom made over moulded cable that offers superior flexibility and resistance to oils and ultraviolet light. The cable will not stiffen after exposure to ultraviolet light.

## STANDARD KIT CONTENTS

Cygnus 4 ultrasonic thickness gauge; padded carry case; operating manual; adjustable neck strap and loops; wrist strap; accessory pouch; spare membranes; surface and membrane couplant; test block; 3 x AA batteries; mini USB - USB cable and instruction manual; optional Krusell® belt clip.

## CYGNUS REGIONAL OFFICES

### Cygnus Headquarters

Cygnus Instruments Ltd  
Cygnus House  
30 Prince of Wales Road  
Dorchester  
Dorset DT1 1PW  
United Kingdom

T: +44 (0) 1305 265 533  
E: [sales@cygnus-instruments.com](mailto:sales@cygnus-instruments.com)  
W: [www.cygnus-instruments.com](http://www.cygnus-instruments.com)

### Cygnus USA

Cygnus Instruments Inc.  
PO Box 6417  
Annapolis  
MD 21401  
USA

T: +1 (410) 267 9771  
E: [sales@cygnusinstruments.com](mailto:sales@cygnusinstruments.com)  
W: [www.cygnusinstruments.com](http://www.cygnusinstruments.com)

### Cygnus UAE

Cygnus Instruments Middle East  
P.O. Box 127267  
Jebel Ali Free Zone (JAFZA)  
Dubai  
UAE

T: +971 50 3459305  
E: [ribu@cygnus-instruments.com](mailto:ribu@cygnus-instruments.com)  
W: [www.cygnus-instruments.com](http://www.cygnus-instruments.com)

### Cygnus Singapore

Cygnus Instruments (S) Pte Ltd  
63 Jalan Pemimpin #05-01  
Pemimpin Industrial Building  
577219  
Singapore

T: +65 6252 5909  
E: [sales@cygnus-instruments.sg](mailto:sales@cygnus-instruments.sg)  
W: [www.cygnus-instruments.sg](http://www.cygnus-instruments.sg)

